

6177103

6177103A 6177103G

2Xpol | 65° Az | 17.1 / 17.1 dBi | 0-12° / 0-12° | 1927 x 573 mm

- Twin band tri-sector antenna, dual polarisation, 4 connectors per sector
- Independent tilt on each band 0-12° / 0-12°
- MET and RET versions, AISG1.1 or 3GPP/AISG2.0
- Single RET module to control all tilt angles, fully inserted inside the antenna (field replaceable)



ORDERING OPTIONS	THREE SECTORS	TWO SECTORS	ONE SECTOR
The 6177103 is a Tri-Sector system that contains three Twin Band antennas installed at 120° in a cylindrical shroud with ±15° azimuth panning capability independent on each sector. A service area at the bottom can be opened for access to connectors and the manual adjustment of the electrical downtilt and azimuth panning. Variants can be delivered with only one or two sectors fitted. See below for ordering details.			
Manual Electrical Tilt Antenna	6177103	6177102	6177101
Remote Electrical Tilt Antenna AISG1.1	6177103A	6177102A	6177101A
Remote Electrical Tilt Antenna 3GPP/AISG2.0 with an MDCU RET Actuator	6177103G	6177102G	6177101G



ACCESS PORT DESCRIPTION (CONNECTORS)		
The antenna has 8 colour-coded connectors located at the bottom face of each sector.		
Frequency Designation	Y1	Y2
Frequency Range	1710-2690 MHz	1710-2690 MHz
Polarisation	Xpol	Xpol
Horizontal Beamwidth	65°	65°
Electrical Downtilt Range	0-12°	0-12°
Connector Type	(2x) 7/16-DIN Female Ultra Long Neck	(2x) 7/16-DIN Female Ultra Long Neck

ELECTRICAL CHARACTERISTICS	Y1				
Frequency Bands	1695-2690 MHz				
	1695-1880 MHz	1850-1990 MHz	1920-2180 MHz	2300-2500 MHz	2490-2690 MHz
Gain	16.7 dBi ± 0.3 dB	16.6 dBi ± 0.3 dB	16.8 dBi ± 0.4 dB	16.9 dBi ± 0.4 dB	17.1 dBi ± 0.5 dB
Input Impedance	50Ω				
VSWR	< 1.5				
Polarisation	±45°				
Horizontal Beamwidth (-3 dB)	70.6° ± 4.5°	70.4° ± 4.7°	72.2° ± 5.2°	67.3° ± 4.2°	62.2° ± 4.1°
Vertical Beamwidth (-3 dB)	7.1° ± 0.4°	6.5° ± 0.4°	6.1° ± 0.5°	5.3° ± 0.2°	4.9° ± 0.3°
Electrical Downtilt Range	0-10°				
Inter/Intra Band Isolation	> 25 dB				
Upper Sidelobe Rejection (20° sector above main beam)	> 17.1 dB	> 17.2 dB	> 17.1 dB	> 15.6 dB	> 15.6 dB
Front-to-Back Ratio @ 180° ±30°	> 26.6 dB	> 26.8 dB	> 27.1 dB	> 25.8 dB	> 24.8 dB
Cross Polar Ratio - Main Direction	> 21.6 dB	> 19.1 dB	> 18.9 dB	>19.8 dB	> 17.4 dB
Maximum Power (Per Port)	160 W				
Intermodulation 3rd Order for 2 x 20W Carriers	< -110 dBm				

Values based on NGMN-P-BASTA version 9.6 requirements.

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.



6177103

6177103A 6177103G

2Xpol | 65° Az | 17.1 / 17.1 dBi | 0-12° / 0-12° | 1927 x 573 mm

ELECTRICAL CHARACTERISTICS	Y2				
Frequency Bands	1695-2690 MHz				
	1695-1880 MHz	1850-1990 MHz	1920-2180 MHz	2300-2500 MHz	2490-2690 MHz
Gain	16.8 dBi ± 0.4 dB	16.6 dBi ± 0.4 dB	16.8 dBi ± 0.5 dB	17.0 dBi ± 0.5 dB	17.1 dBi ± 0.5 dB
Input Impedance	50Ω				
VSWR	< 1.5				
Polarisation	±45°				
Horizontal Beamwidth (-3 dB)	71.0° ± 3.5°	70.0° ± 3.4°	72.3° ± 4.8°	67.2° ± 3.2°	63.2° ± 4.5°
Vertical Beamwidth (-3 dB)	7.2° ± 0.4°	6.6° ± 0.4°	6.1° ± 0.6°	5.3° ± 0.2°	4.9° ± 0.2°
Electrical Downtilt Range	0-10°				
Inter/Intra Band Isolation	> 25 dB				
Upper Sidelobe Rejection (20° sector above main beam)	> 17.4 dB	> 17.4 dB	> 16.5 dB	> 17.4 dB	> 15.0 dB
Front-to-Back Ratio @ 180° ±30°	> 26.0 dB	> 27.9 dB	> 26.8 dB	> 26.9 dB	> 26.2 dB
Cross Polar Ratio - Main Direction	> 22.3 dB	> 20.4 dB	> 20.1 dB	> 19.3 dB	> 18.1 dB
Maximum Power (Per Port)	160 W				
Intermodulation 3rd Order for 2 x 20W Carriers	< -110 dBm				

Values based on NGMN-P-BASTA version 9.6 requirements.

ELECTRICAL DOWNTILT CONTROL	
Electrical downtilt for each band can be controlled separately. Tilt indicator(s) are covered by removable transparent cap(s).	
Manual Electrical Tilt (MET) Control	A coloured knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob colour is identical to the corresponding connector ring colour. To access the knob, remove the cap by turning it counter-clockwise. It is re-installed by opposite rotation. Do not remove the transparent cap(s) from the antenna.
Remote Electrical Tilt (RET) Control	The remote control of the electrical tilt is managed by a Multi-Device Control Unit (MDCU) inserted in the bottom of the antenna. A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna. For RET control, the transparent caps must be in place and locked. The tilt angle indicators always remain visible and the antenna still has manual tilt control (manual override).

RET-Ready antennas are delivered with the RET Actuator (MDCU) already installed and pre-commissioned with all antenna parameters. Every RET device is factory configured and calibrated so the antenna is ready to be used once delivered to the site which means that there is no need for further installation of RET devices or for programming their configuration or for running a calibration process.

RET-Ready Actuator (one per antenna)	Multi-Device Control Unit (MDCU). The MDCU is an electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. Refer to ordering options.		
	Part Number	MDCU-A0000	for AISG1.1 Protocol
			Three MDCU-A0000 units included in 6177103A
	Part Number	MDCU-G0000	for 3GPP/AISG2.0 Protocol
			Three MDCU-G0000 units included in 6177103G

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6177103

6177103A 6177103G

2Xpol | 65° Az | 17.1 / 17.1 dBi | 0-12° / 0-12° | 1927 x 573 mm

ENVIRONMENTAL CHARACTERISTICS	
Operating Temperature Range	-40° C to +60° C
Environmental	ETS 300 019
RoHS Compliant	Yes
MECHANICAL CHARACTERISTICS	
Dimensions (see drawing)	Height: 1927 mm (includes 408 mm Service Area) Diameter: 573 mm
Relative Direction of Internal Antennas (Sector Axis)	0° (±15°) 120° (±15°) 240° (±15°)
Weight	Three Sectors: 103 kg Two Sectors: 89 kg One Sector: 75 kg
Shroud	Outdoor plastic, Grey RAL7035
Wind Speed	Operational: 160 km/hr Survival: 200 km/h
Wind Load at 150 km/h	827 N

TRIO EXTENSION

A TRIO Extension is a short mounting (0.85 m) mast which has the same diameter (573 mm), same outside material, and same colour as the antenna. The two major advantages of the extensions are getting the antenna higher, and housing our TMA.

Dimensions (Height x Diameter)	850 x 573 mm	
Weight	66 kg	
Shroud	Outdoor plastic, Grey RAL7035	
Flange	Galvanised Steel	
Wind Speed	Operational	160 km/h
	Survival	200 km/h




Refer to the separate documentation on TRIO extensions for more details.

6177103


6177103A 6177103G

2Xpol | 65° Az | 17.1 / 17.1 dBi | 0-12° / 0-12° | 1927 x 573 mm


Bottom View of Antenna

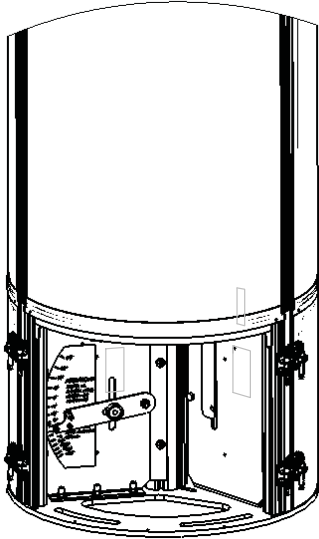

Dimensions (in mm)

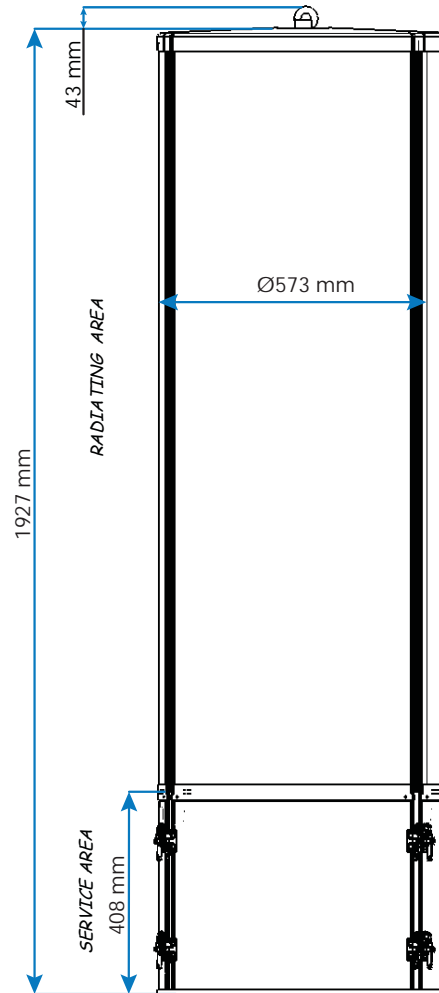

Mounting Flange Interface

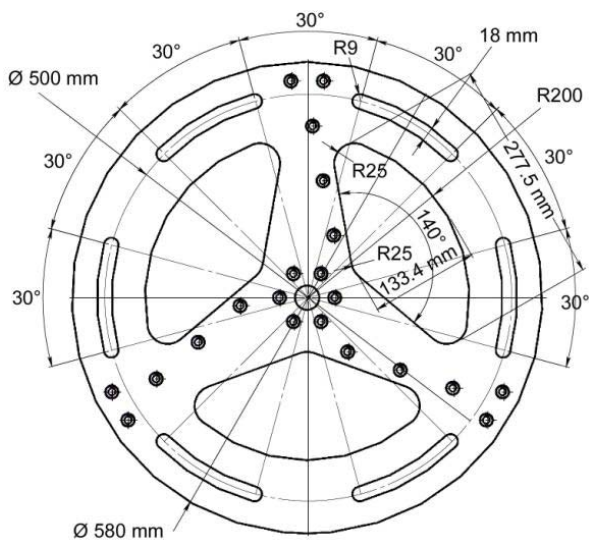

Six curved slots 18 mm wide on a 500 mm diameter circle