

6876300

6876300A 6876300G

3Xpol | 65° Az | 14.0 / 17.1 / 17.2 dBi | 0-10° / 0-10° / 0-12° | 1498 x 305 x 162 mm

- Tri band antenna, dual polarisation, 6 connectors
- Independent tilt on each band 0-10° / 0-10° / 0-12°
- UltraLine platform with multi-array capability
- MET and RET versions, AISG1.1 or 3GPP/AISG2.0
- Single RET module to control all tilt angles, fully inserted inside the antenna (field replaceable)

UltraLine
LTE Ready

ORDERING OPTIONS	MODEL NUMBER
Manual Electrical Tilt Antenna	6876300
Remote Electrical Tilt Antenna AISG1.1	6876300A
Remote Electrical Tilt Antenna 3GPP/AISG2.0 with an MDCU RET Actuator	6876300G

ACCESS PORT DESCRIPTION (CONNECTORS)

The antenna has 6 colour-coded connectors located at the bottom face.

Frequency Designation	R1	Y1	Y2
Frequency Range	698-960 MHz	1710-2690 MHz	1710-2690 MHz
Polarisation	Xpol	Xpol	Xpol
Horizontal Beamwidth	70°	65°	65°
Electrical Downtilt Range	0-10°	0-10°	0-12°
Connector Type	(2x) 7/16-DIN Female Long Neck	(2x) 7/16-DIN Female Ultra Long Neck	(2x) 7/16-DIN Female Ultra Long Neck

ELECTRICAL CHARACTERISTICS	R1			
Frequency Bands	698-960 MHz			
	698-806 MHz	790-862 MHz	824-894 MHz	880-960 MHz
Gain	13.2 dBi ± 0.3 dB	13.7 dBi ± 0.3 dB	13.9 dBi ± 0.2 dB	14.0 dBi ± 0.3 dB
Input Impedance	50Ω			
VSWR	< 1.5			
Polarisation	±45°			
Horizontal Beamwidth (-3 dB)	72.6° ± 2.8°	69.8° ± 1.8°	69.3° ± 2.0°	68.4° ± 5.1°
Vertical Beamwidth (-3 dB)	16.6° ± 1.7°	14.8° ± 1.3°	14.0° ± 0.6°	12.8° ± 1.3°
Electrical Downtilt Range	0-10°			
Inter/Intra Band Isolation	> 25 dB			
Upper Sidelobe Rejection (20° sector above main beam)	> 18.7 dB	> 16.5 dB	> 17.7 dB	> 18.2 dB
Front-to-Back Ratio @ 180° ±30°	> 22.3 dB	> 22.6 dB	> 22.5 dB	> 21.0 dB
Cross Polar Ratio - Main Direction	> 16.3 dB	> 16.0 dB	> 15.3 dB	> 14.4 dB
Maximum Power (Per Port)	200 W			
Intermodulation 3rd Order for 2 x 20W Carriers	< -110 dBm			



Values based on NGMN-P-BASTA version 9.6 requirements.

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

698-960 | 1710-2690 | 1710-2690 MHz

6876300

6876300A 6876300G

3Xpol | 65° Az | 14.0 / 17.1 / 17.2 dBi | 0-10° / 0-10° / 0-12° | 1498 x 305 x 162 mm

ELECTRICAL CHARACTERISTICS	Y1			
	1710-2690 MHz			
Frequency Bands	1710-1880 MHz	1850-1990 MHz	1920-2180 MHz	2490-2690 MHz
Gain	16.7 dBi ± 0.2 dB	16.8 dBi ± 0.2 dB	17.0 dBi ± 0.3 dB	17.1 dBi ± 0.2 dB
Input Impedance	50Ω			
VSWR	< 1.5			
Polarisation	±45°			
Horizontal Beamwidth (-3 dB)	64.8° ± 3.5°	66.9° ± 3.7°	67.7° ± 4.0°	63.0° ± 4.1°
Vertical Beamwidth (-3 dB)	6.6° ± 0.3°	6.2° ± 0.4°	5.8° ± 0.5°	4.7° ± 0.2°
Electrical Downtilt Range	0-10°			
Inter/Intra Band Isolation	> 25 dB			
Upper Sidelobe Rejection (20° sector above main beam)	> 17.8 dB	> 17.1 dB	> 16.3 dB	> 15.7 dB
Front-to-Back Ratio @ 180° ±30°	> 26.1 dB	> 25.9 dB	> 27.4 dB	> 28.2 dB
Cross Polar Ratio - Main Direction	> 15.3 dB	> 14.4 dB	> 13.8 dB	> 13.0 dB
Maximum Power (Per Port)	200 W			
Intermodulation 3rd Order for 2 x 20W Carriers	< -110 dBm			

Values based on NGMN-P-BASTA version 9.6 requirements.

ELECTRICAL CHARACTERISTICS	Y2			
	1710-2690 MHz			
Frequency Bands	1710-1880 MHz	1850-1990 MHz	1920-2180 MHz	2490-2690 MHz
Gain	16.6 dBi ± 0.3 dB	16.7 dBi ± 0.2 dB	17.0 dBi ± 0.3 dB	17.2 dBi ± 0.3 dB
Input Impedance	50Ω			
VSWR	< 1.5			
Polarisation	±45°			
Horizontal Beamwidth (-3 dB)	67.1° ± 4.5°	67.9° ± 4.6°	66.1° ± 4.9°	62.5° ± 2.2°
Vertical Beamwidth (-3 dB)	7.3° ± 0.4°	6.9° ± 0.3°	6.3° ± 0.7°	5.1° ± 0.2°
Electrical Downtilt Range	0-12°			
Inter/Intra Band Isolation	> 25 dB			
Upper Sidelobe Rejection (20° sector above main beam)	> 18.2 dB	> 18.6 dB	> 18.6 dB	> 16.6 dB
Front-to-Back Ratio @ 180° ±30°	> 26.0 dB	> 25.9 dB	> 25.7 dB	> 28.1 dB
Cross Polar Ratio - Main Direction	> 18.7 dB	> 21.4 dB	> 20.9 dB	> 21.1 dB
Maximum Power (Per Port)	200 W			
Intermodulation 3rd Order for 2 x 20W Carriers	< -110 dBm			

Values based on NGMN-P-BASTA version 9.6 requirements.

Several patents pending regarding this product. Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.

6876300

6876300A 6876300G

3Xpol | 65° Az | 14.0 / 17.1 / 17.2 dBi | 0-10° / 0-10° / 0-12° | 1498 x 305 x 162 mm

ELECTRICAL DOWNTILT CONTROL

Electrical downtilt for each band can be controlled separately. Tilt indicator(s) are covered by removable transparent cap(s).

Manual Electrical Tilt (MET) Control	A coloured knob at the end of the tilt indicator allows change of the tilt without need of a tool. The knob colour is identical to the corresponding connector ring colour. To access the knob, remove the cap by turning it counter-clockwise. It is re-installed by opposite rotation. Do not remove the transparent cap(s) from the antenna.
Remote Electrical Tilt (RET) Control	The remote control of the electrical tilt is managed by a Multi-Device Control Unit (MDCU) inserted in the bottom of the antenna. A single actuator individually controls the tilt of each band (no need for daisy chain cables between the bands). This module does not add any additional length to the antenna. For RET control, the transparent caps must be in place and locked. The tilt angle indicators always remain visible and the antenna still has manual tilt control (manual override).

RET-Ready antennas are delivered with the RET Actuator (MDCU) already installed and pre-commissioned with all antenna parameters. Every RET device is factory configured and calibrated so the antenna is ready to be used once delivered to the site which means that there is no need for further installation of RET devices or for programming their configuration or for running a calibration process.

RET-Ready Actuator (one per antenna)	Multi-Device Control Unit (MDCU). The MDCU is an electronic module that allows the remote control of the electrical downtilt (RET) in Amphenol antennas with factory embedded motors. Refer to ordering options.			
	Part Number	MDCU-A0000	for AISG1.1 Protocol	One MDCU-A0000 unit included in 6876300A
	Part Number	MDCU-G0000	for 3GPP/AISG2.0 Protocol	One MDCU-G0000 unit included in 6876300G

ENVIRONMENTAL CHARACTERISTICS

Operating Temperature Range	-40° C to +60° C
Environmental	ETS 300 019
RoHS Compliant	Yes

PACKAGING

Carton Box
1.70 x 0.40 x 0.28 m
0.19 m³
29 kg

MECHANICAL CHARACTERISTICS

Dimensions (see drawing)	Height: 1498 mm Width: 305 mm Depth: 162 mm
Weight	20 kg (excluding mounting accessory)
Shroud	Outdoor plastic, Grey RAL7035
Wind Speed	Operational: 160 km/hr Survival: 200 km/h
Wind Load at 150 km/h	Frontal: 531 N Lateral: 242 N Rear: 521 N

MOUNTING KIT OPTIONS

	PART NUMBER	WEIGHT
All mounting bracket kits are ordered separately unless otherwise indicated.		
Brackets for pole Ø48 to Ø115 mm (delivered as standard)	0900181/00	3.4 kg
Brackets for pole Ø70 to Ø150 mm (optional)	0900182/00	3.9 kg
Kit to add mechanical tilt (0°-10°) to above brackets (optional)	0900397/00	3.0 kg


Wall mounting brackets are available upon request.

6876300


6876300A 6876300G

3Xpol | 65° Az | 14.0 / 17.1 / 17.2 dBi | 0-10° / 0-10° / 0-12° | 1498 x 305 x 162 mm

Bottom View of Antenna

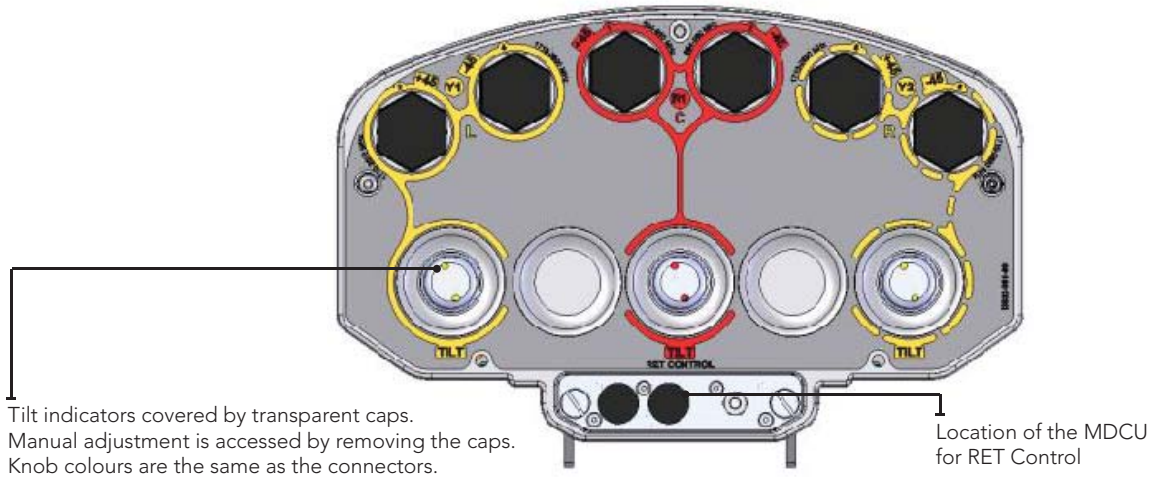

Dimensions (in mm)

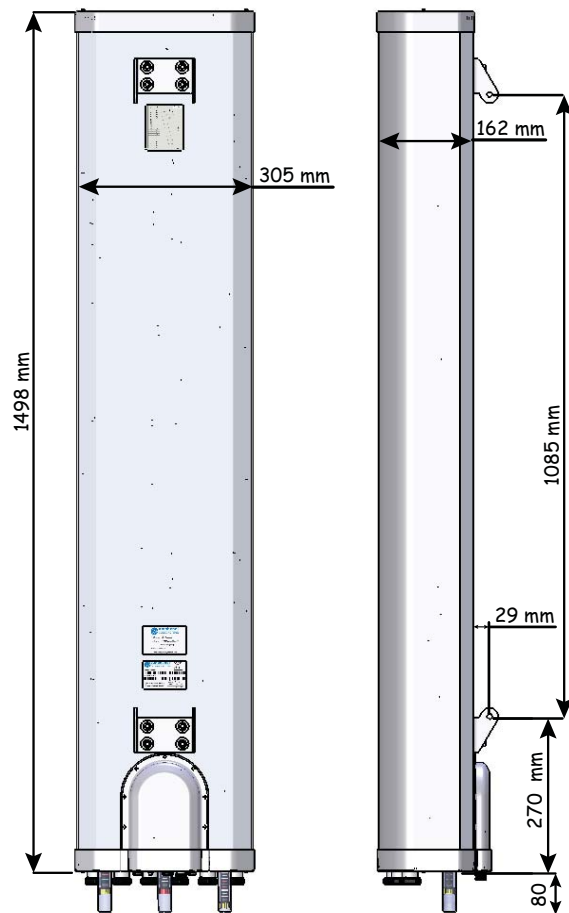

Installation



Always attach the antenna by the two mounting points. Do not install the antenna with the connectors facing upward.

In order to operate RET control, the transparent cap covering the tilt adjustment indicator must be engaged and locked. Do not cut it from the antenna.