

L-020MXxx-CC

This model was previously released
as AL-020-ML-xx-CC


20W Termination Loads | Indoor / Outdoor Use

- Absorbs RF and microwave energy
- Available with a variety of connector options



Ordering Options	
Model Number	L-020MX43M-CC
Electrical Characteristics	
Frequency Range	650-3000 MHz
VSWR	≤ 1.15
Power	20 W
Intermodulation (2x43 dBm)	≤ -160 dBc
Impedance	50Ω
Mechanical Characteristics	
Dimensions (Length x Width x Depth)	198.8 x Ø36 mm
Connector Type (xx)	4.3/10 Female (43M)
Environmental Characteristics	
Operating Temperature	-35° C to +55° C
Application	Indoor / Outdoor
Standard	IP65

L-020MX43M-CC

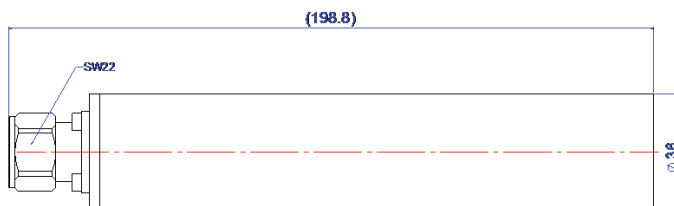

Quoted performance parameters are provided to offer typical, peak or range values only and may vary as a result of normal testing, manufacturing and operational conditions. Extreme operational conditions and/or stress on structural supports is beyond our control. Such conditions may result in damage to this product. Improvements to products may be made without notice.